

Mobile Printers

MX30 / MX30i

A Portable Light Weight Design
MX30 & MX30i is Your Best Pal in Mobile Life.

GoDEX MX30 & MX30i Mobile Printer is powered by Lithium-ion battery for longer uptime, along with water / dust resistant and shatterproof design. MX30i has an embedded OLED panel to display messages. MX30 & MX30i series fit 1.5" to 3" label roll, which is a powerful tool for retail / storage / parking lot applications.



- Supports multiple label width & types.
- Drop & Fit label installation design.
- Intuitive OLED display with 3 buttons.
- Water and dust resistant meeting IP54 standard.
- Versatile interfaces with both wire (RS232 and USB) & wireless (Bluetooth and Wi-Fi) connectivity.

Specification

MX30/MX30i

Mobile Printer

| Model | MX30 | MX30i |
|----------------------------|---|--------------------------------|
| Print Method | Direct Thermal | |
| Resolution | 203 dpi (8 dots/mm) | |
| Print Speed | Up to 4 IPS (101.6 mm/s) | |
| Print Width | 2.8" (72 mm) | |
| Print Length | 30" (~762 mm) | |
| Processor | 32 Bit RISC CPU | |
| Memory Flash | 128 MB Flash (60 MB for user storage) | |
| SDRAM | 32 MB | |
| Sensor Type | Gap sensor , Fixed transmissive sensor , Fixed reflective sensor | |
| Media Types | Direct Thermal receipt, anti-UV receipt, gap label, left side alignment Inter-label gap size from 2 mm to 4 mm. 3 mm preferred | |
| Width | Max. 3.15" (80 mm), Min. 1.5" (38.1 mm) | |
| Thickness | Min 0.0508 mm, Max 0.165 mm | |
| Media roll Diameter | Max. 2.35" (60 mm) on 0.5" (12.5 mm) core | |
| Printer Language | GPOS Emulations or EZPL / GZPL / GEPL / GDPL Emulations | |
| Software | Label Design Software GoLabel (for EZPL only), GoApp (Andriod),GoApp (iOS) Driver Vista, Windows 7, Windows 8 & 8.1, Windows 10, Windows Server 2008 R2, 2012, 2012 R2, 2016, 2019, MAC, Linux SDK Win CE, .NET, Windows Vista, Windows 7, Windows 8 & 8.1, Windows 10, Android, Mac, iOS | |
| Resident Fonts | Bitmap Fonts 6, 8, 10, 12, 14, 18, 24, 30, 16x26 and OCR A & B. 0°, 90°, 180°, 270° rotatable TTF Fonts TTF Fonts (Bold / Italic / Underline). 0°,90°, 180°, 270° rotatable | |
| Download Fonts | Bitmap Fonts 90°, 180°, 270° rotatable, single characters 90°, 180°, 270° rotatable Asian Fonts 16x16, 24x24. Traditional Chinese (BIG-5), Simplified Chinese (GB2312), Japanese (S - JIS), Korean (KS - X1001) 90°, 180°, 270° rotatable and 8 times expandable in horizontal and vertical directions TTF Fonts 90°, 180°, 270° rotatable | |
| Barcodes | 1-D Bar codes China Postal Code, Codabar, Code 11, Code 32,Code 39, Code 93, Code 128 (subset A, B, C), EAN-8/EAN-13 (with 2 & 5 digits extension), EAN 128, FIM, German Post Code, GS1 DataBar, HIBC, Industrial 2 of 5 , Interleaved 2-of-5 (I 2 of 5), Interleaved 2-of-5 with Shipping Bearer Bars, ISBT-128, ITF 14, Japanese Postnet, Logmars, MSI, Postnet, Plessey, Planet 11 & 13 digit, RPS 128, Standard 2 of 5, Telepen, Matrix 2 of 5, UPC-A/UPC-E (with 2 or 5 digit extension), UCC/EAN-128 K-Mart and Random Weight 2-D Bar codes Aztec code, Code 49,Codablock F , Datamatrix code, MaxiCode, Micro PDF417, Micro QR code, PDF417, QR code, TLC 39, GS1 Composite | |
| Code Pages | CODEPAGE 437, 850, 851, 852, 855, 857, 860, 861, 862, 863, 865, 866, 869, 737 WINDOWS 1250, 1251, 1252, 1253, 1254, 1255, 1257 Unicode UTF8 · UTF16BE · UTF16LE | |
| Graphics | Resident graphic file types are BMP and PCX, other graphic formats are downloadable from the software | |
| Interfaces | RS232 + USB 2.0 port, mini-B type connector Bluetooth 2.1 + EDR | |
| Control Panel | 4 dual color LEDs for Power, Battery, Communication, Error status indication. 3 buttons for Power, Feed and BT functions | |
| LCD Display | Graphic OLED 128 x 64 dots with 3 buttons for Up, Down and Enter functions | |
| Power Adapter | Switching power supply I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.2 A I/P: 100 / 240 V AC, 50 / 60 Hz, DC 9 V / 2.0 A | |
| Battery | Rechargeable DC 7.4 V Lithium-ion battery, 2500 mAH or higher capacitance | |
| Environment | Operation Temperature 14 °F to 122 °F (-10°C to 50°C) Storage Temperature -4 °F to 140 °F (-20°C to 60°C) | |
| Humidity | Operation 10 – 90 %, non - condensing. Storage 10 – 90 %, non - condensing. | |
| IP Rating | Intrusion Protection, IP42 requirement for case design, IP54 for protective case | |
| Drop Level | 1.5 meter height | |
| Agency Approvals | CE EMC, FCC part 15B class B, FCC Part 15C, SRRC, NCC, CB, UL, cUL, Energy Star V2.0 | |
| Dimension | Length 6.71" (170.63 mm) Height 3.11" (79 mm) Width 4.48" (114.01 mm) | |
| Weight | 1.45 lbs (660 g), with battery | 1.47 lbs (670 g), with battery |
| Options | USB cable RS-232 cable Li-ion battery 4-bay battery charger station Car charger adapter Protective case WiFi (comply with IEEE 802.11b/g/n) | |

*Specifications are subject to change without notice. All company and/or product names are trademarks and/or registered trademarks of their respective owners.

Applications

Applications for Labels & Barcodes

MX30 & MX30i support label & barcode printings Anywhere and Anytime.



Warehouses, Logistic & Transportation

Cross Docking, inventory management, receiving / shipping, work - in - process tracking, or related industrial applications.

Retail

Content labels, receipts for registered mails, invoices & receipts, postage labels, etc.

Parking Management

Parking receipt, parking ticket, and so on.


GoDEX

LABEL DESIGN SOFTWARE

GoLabel Software / User Friendly

GoLabel is based on a WYSIWYG (what you see is what you get) user interface, makes everything so easy for you to create and print barcode labels. GoLabel is the first - choice label design software that you can't miss it!

Go visit www.godexintl.com and download GoLabel to experience it!

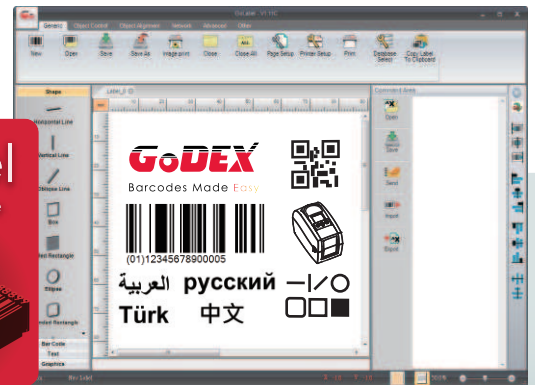


GoDEX

RIBBONS

High quality original GoDEX thermal transfer ribbons

GoDEX offers premium thermal transfer ribbons that will fit most of your printing applications.

- Wax
- Wax / Resin
- Resin
- Near Edge

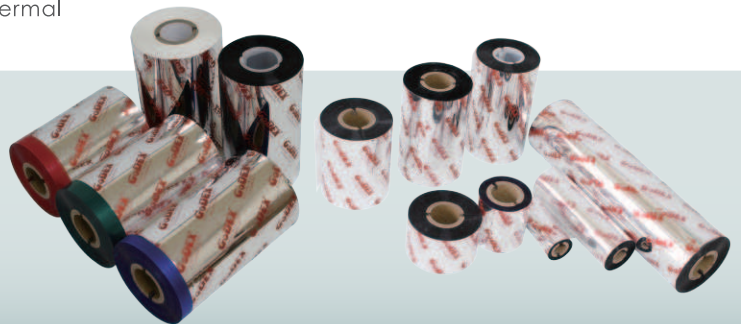

GoDEX
www.godexintl.com

Godex International
(Headquarters)
Telephone : +886 2 2225 8580
Contact us : infoGT@godexintl.com

Godex Americas
Telephone : +1 805 987 5100
Contact us : infoGA@godexintl.com

Godex China
Telephone : +86 21 56651313
Contact us : infoGC@godexintl.com

Godex Europe
Telephone : +49 2195 59599 0
Contact us : infoGE@godexintl.com