

# imageRUNNER ADVANCE C5500 III series

# HIGH PERFORMANCE OFFICE COMMUNICATION PLATFORM



Canon uniFLOW Online  
Outstanding Cloud Document Management Solution




Canon Inc.  
imageRUNNER ADVANCE C5535i  
Outstanding 41- to 40-ppm A3 Colour MFP



Canon Inc.  
imageRUNNER ADVANCE C5550i  
Outstanding 41- to 50-ppm A3 Colour MFP

## MAIN CONFIGURATION OPTIONS

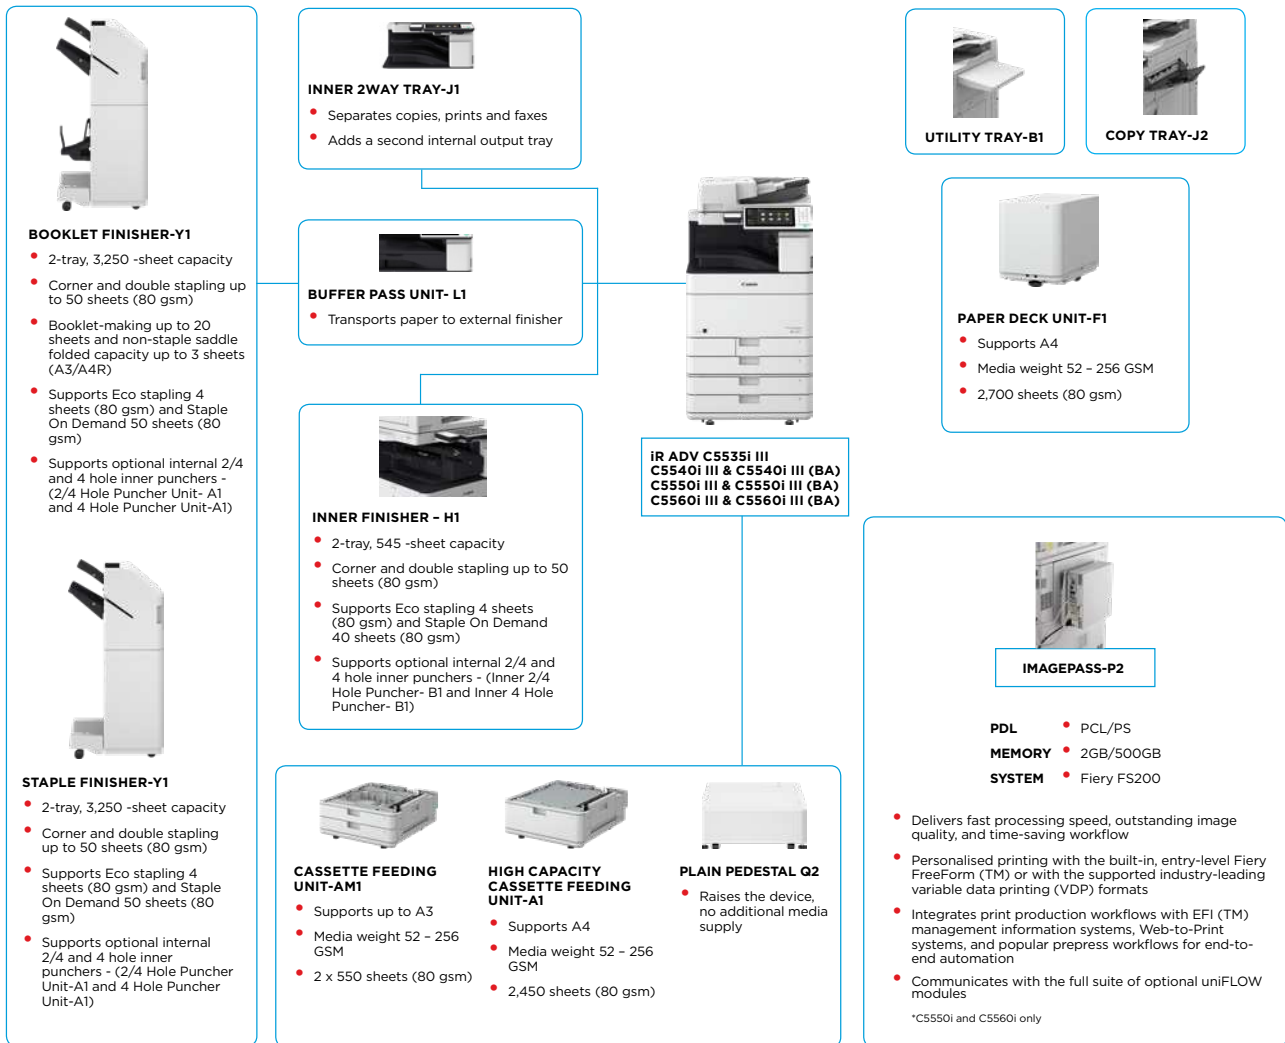

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online product configurator.

III\* indicates that this model has been upgraded to new system software and includes additional security features as standard.

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE C5500 III series

## MAIN UNIT

**Machine type**  
**Core functions**  
**Processor**  
**Control Panel**  
**Memory**  
**Hard Disk drive**  
**Mirroring Hard Disk Drive**  
**Interface Connection**

A3 Colour Laser Multifunctional  
 Print, Copy, Scan, Send, Store and Optional Fax  
 Canon Dual Custom Processor (Shared)  
 25.6 cm (10.1 inch) TFT LCD WSVGA Colour Touch panel  
 Standard: 4.0GB RAM  
 Standard: 250GB Maximum: 1TB  
 Optional: 250GB, 1TB

## Paper Supply Capacity (A4, 80gsm)

**NETWORK**  
 Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n);  
 Optional: NFC, Bluetooth Low Energy  
**OTHERS**  
 Standard: USB 2.0 (Host) x2, USB 3.0 (Host) x1, USB 2.0 (Device) x1;  
 Optional: Serial Interface, Copy Control Interface  
 Standard: 1,200 sheets  
 2 x 550-sheet cassettes, 100-sheet multi-purpose tray  
 Maximum: 6,350 sheets (with HIGH CAPACITY CASSETTE FEEDING UNIT-A1 + PAPER DECK UNIT-F1)

## Paper output capacity (A4, 80gsm)

Standard: 250 sheets  
 Maximum: 3,450 Sheets (with STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1 and COPY TRAY-J2)

## Finishing capabilities

Standard: Collate, Group  
 With Inner Finisher : Collate, Group, Offset, Staple, Hole Punch\*1, Staple-Free Staple, Staple On Demand  
 With External Finisher\*2 : Collate, Group, Offset, Staple, Saddle Stitch\*3, Hole Punch\*4, Staple-Free Staple, Staple On Demand

\*1 Requires Inner 2/4 Hole Puncher-B1 or Inner 4 Hole Puncher-B1  
 \*2 Requires Buffer Pass-L1  
 \*3 Requires Booklet Finisher-Y1  
 \*4 Requires 2/4 Hole Puncher Unit-A1 or 4 Hole Puncher Unit-A1

## Supported media types

Upper Cassette 1:  
 Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Bond, Envelope, Letterhead  
 Lower Cassette 2:  
 Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tab\*, Bond, Envelope, Letterhead  
 \*Requires TAB FEEDING ATTACHMENT-F1

## Supported media sizes

Multi-purpose tray:  
 Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Tracing\*, Label, Tab, Bond, Coated, Envelope, Letterhead  
 \* Some types of tracing paper cannot be used.  
 Upper Cassette 1:  
 Standard size: A4, A5, A5R, A6R (Simplex only), B5, Envelope  
 [No.10 (COM10), DL, ISO-C5]  
 Custom size:  
 Min. 98.0 x 148.0 mm up to 297.0 x 215.9 mm  
 Lower Cassette 2:  
 Standard size: A3, A4, A4R, A5, A5R, A6R (Simplex only), B4, B5, B5R, Envelope  
 [No.10 (COM10), Monarch, DL, ISO-C5]  
 Custom size:  
 Min. 98.0 x 182.0 mm up to 304.8 x 457.2 mm

## Supported media weights

Multi-purpose tray:  
 Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Envelopes [No. 10 (COM 10), Monarch, ISO-C5, DL]  
 Envelope Custom Size  
 (Min. 98.0 x 98.4 mm up to 320.0 x 457.2 mm).  
 Custome Size:  
 Min. 98.0 x 139.7 mm up to 320.0 x 457.2 mm  
 Free Size: Min. 98.0 x 139.7 mm up to 320.0 x 457.2 mm

## Warm-up Time

Cassettes: 52 to 256 gsm  
 Multi-purpose tray: 52 to 300 gsm  
 Duplex: 52 to 220 gsm  
 From Power On: 10 Seconds or less\*  
 \* Time from device power-on, until copy ready (not print reservation).  
 From Sleep Mode: 10 Seconds or Less  
 Quick Startup Mode: 4 Seconds or less\*  
 \* Time from device power-on to when key operation can be performed on the touch panel display.

## Dimensions (W x D x H)

iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III:  
 620 x 742 x 950 mm  
 [iR-ADV C5560i III/C5550i III/C5540i III (BA models) :  
 620 x 866 x 950 mm]

## Installation Space (W x D)

iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III  
 Basic: 980 x 1,176 mm  
 (Right Cover Open + Cassette Drawers Open)  
 Fully Configured: 1,866 x 1,176 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open)  
 [iR-ADV C5560i III/C5550i III/C5540i III (BA models) :  
 Basic: 980 x 1,300 mm  
 (Right Cover Open + Cassette Drawers Open)  
 Fully Configured: 1,866 x 1,300 mm (Booklet Finisher-Y1 with the extension tray extended + Paper Deck Unit-F1 + Cassette Drawers open) ]

## Weight

iR-ADV C5560i III/C5550i III/C5540i III/iR-ADV C5535i III:  
 Approx.142 kg including toner  
 [iR-ADV C5560i III/C5550i III/C5540i III (BA models) :  
 Approx. 143 kg including toner]

## PRINT SPECIFICATIONS

### Print Speed (BW/CL)

iR-ADV C5560i III  
 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60 ppm (A5R), 60 ppm (A6R)

iR-ADV C5550i III  
 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50 ppm (A5R), 50 ppm (A6R)

iR-ADV C5540i III  
 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40 ppm (A5R), 40 ppm (A6R)

iR-ADV C5535i III  
 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35 ppm (A5R), 35 ppm (A6R)

### Print Resolution (dpi)

600 x 600, 1,200 x 1,200 (up to)

### Page description languages

Standard: UFR II, PCL 6, Genuine Adobe PostScript Level 3

### Direct Print

Direct printing available from USB memory, Advanced Space, Remote UI and Web Access\*  
 Supported file types: TIFF, JPEG, PDF, EPS, and XPS  
 \* Only PDF print from websites is supported

### Printing from mobile and cloud

AirPrint, Mopria, Google Cloud Print, and Canon PRINT Business, and uniFLOW Online. A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information

### Fonts

PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT /J/K/S/T\*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts\*2 PS fonts: 136 Roman

\*1 Requires optional PCL International Font Set-A1

\*2 Requires optional Barcode Printing Kit-D1

### Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile Settings, Secured Print, Watermark, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Mixed Paper Sizes/ Orientations, Offsetting, Front/Back Covers, Toner Reduction, Poster Printing, Forced Hold Printing

### Operating System

UFR II: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016, MAC OS X (10.7 or later)  
 PCL: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016  
 PS: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2012 R2 / Server 2016, MAC OS X (10.7 or later)  
 PPD: MAC OS X (10.7 or later), Windows 7 / 8.1 / 10

SAP Device Types are available via the SAP Market Place. Please refer to <http://www.canon-europe.com/support/business-product-support> for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.

## COPY SPECIFICATIONS

### Copy Speed (BW/CL)

iR-ADV C5560i III  
 60 ppm (A4), 32 ppm (A3), 36 ppm (A4R), 60 ppm (A5R), 60 ppm (A6R)

iR-ADV C5550i III  
 50 ppm (A4), 27 ppm (A3), 30 ppm (A4R), 50 ppm (A5R), 50 ppm (A6R)

iR-ADV C5540i III  
 40 ppm (A4) 22 ppm (A3), 24 ppm (A4R), 40 ppm (A5R), 40 ppm (A6R)

iR-ADV C5535i III  
 35 ppm (A4), 18 ppm (A3), 23 ppm (A4R), 35 ppm (A5R), 35 ppm (A6R)

### First-Copy-Out Time (A4, BW/CL)

iR-ADV C5560i III: Approx. 2.9/4.5 seconds or less  
 iR-ADV C5550i III: Approx. 3.5/5.2 seconds or less  
 iR-ADV C5540i III: Approx. 4.1/6.1 seconds or less  
 iR-ADV C5535i III: Approx. 4.9/7.4 seconds or less

### Copy resolution (dpi)

Reading: 600 x 600  
 Printing: Up to 1,200 x 1,200

### Multiple Copies

Up to 999 copies

### Copy Density

Automatic or Manual (9 Levels)

### Magnification

25% - 400% (1% Increments)

### Preset Reductions

25%, 50%, 70%

### Preset Enlargements

141%, 200%, 400%

### Basic Copy Features

Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel

### Special Copy Features

Book to Two Pages, Two-sided Original, Finishing, Booklet, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Density Adjustment, Original Type Selection, Transparency Cover Sheets, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Gutter, Print & Check, Negative/Positive, Repeat Images, Merge Job Blocks, Job Done Notice, Mirror Image, Print on Tab, Store in Mail Box, Superimpose Image, Copy ID Card, Skip Blank Pages, Detect Feeder Multi Sheet Feed, Free Size Original

## SCAN SPECIFICATIONS

### Type

Colour Platen and Single-pass Duplexing Automatic Document Feeder\*\* [2-sided to 2-sided (Automatic)]

\*\* Detect Feeder Multi Sheet Feed is supported.

### Document Feeder Paper Capacity \* (80 gsm)

150 Sheets



# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE C5500 III series

<b>Acceptable Originals and weights</b>	Platen: Sheet, Book, 3-Dimensional Objects (Height: Up to 50 mm, Weight: up to 2kg)	<b>Network</b>	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME
<b>Supported media sizes</b>	Document Feeder media weight: 1-sided scanning: 38 to 157 gsm (BW) /64 to 157 gsm (CL) 2-sided scanning: 50 to 157 gsm (BW) /64 to 157 gsm (CL) Platen: max. scanning size: 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6R, Custom size: 128.0 x 139.7 mm to 304.8 x 431.8 mm	<b>Document</b>	Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device signature, Secure Watermarks Optional: User signature, Document Scan lock
<b>Scan Speed (ipm: BW/CL; A4) 7</b>	Single-sided Scanning: 80 /80 (300dpi) , 80 /60 (600 dpi) Double-sided Scanning: 160 /160 (300dpi) , 150 /80 (600 dpi)	<b>ENVIRONMENTAL SPECIFICATIONS</b>	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity) 220-240 V (±10 %), 50/60 Hz (±2 Hz), 6 Amp CEE 7/7 (230V)
<b>Scan Resolution (dpi)</b>	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100i, 150 x 150, 100 x 100	<b>Operating Environment</b>	Maximum: Approx. 1,800 W Printing: Approx. 906 W *1 Standby: Approx. 64.8 W *1 Sleep mode: Approx. 0.8 W *2 Plugin Off: Approx. 0.13W *3
<b>Pull Scan Specifications</b>	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows 7/8.1/10 Windows Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016	<b>Power source</b>	
<b>Scan Method</b>	Send functionality available on all models Scan to USB Memory: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information.	<b>Plug (Main Unit)</b>	
<b>Scanning software</b>	TWAIN/WIA Pull scanning available on all models Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device	<b>Power consumption</b>	
<b>SEND SPECIFICATIONS</b>		<b>Noise levels (BW/CL)</b>	
<b>Destination</b>	E-mail/Internet FAX (SMTP), SMB v3.0, FTP, WebDAV, Mail Box, Super G3 FAX(Optional), IP Fax(Optional)		
<b>Address Book</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)		
<b>Send resolution (dpi)</b>	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100		
<b>Communication protocol</b>	File: FTP (TCP/IP), SMB v3.0, WebDAV E-mail/1-Fax: SMTP, POP3		
<b>File Format</b>	Standard: TIFF, JPEG, PDF (Limited Colour, Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b, Encrypted), XPS (Compact, Searchable), Office Open XML (PowerPoint, Word), PDF/XPS (Device Signature) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature)*		
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Pages, Detect Feeder Multi Sheet Feed		
<b>FAX SPECIFICATIONS</b>			
<b>Maximum Number of Connection Lines</b>	2		
<b>Modem Speed</b>	Super G3: 33.6 kbps * G3: 14.4 kbps		
<b>Compression Method</b>	MH, MR, MMR, JBIG		
<b>Resolution (dpi)</b>	400 x 400, 200 x 400, 200 x 200, 200 x 100		
<b>Sending/Recording Size</b>	A3, A4, A4R, A5*, A5R*, B4, B5*, B5R* *1 Sent as A4 *2 Sent as B4		
<b>FAX memory</b>	Up to 30,000 pages * Max. 200		
<b>Speed dials</b>	Max. 199 dials		
<b>Group dials/destinations</b>	Max. 256 addresses		
<b>Sequential broadcast</b>	Yes		
<b>Memory backup</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density (for Scanning), Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Selecting the Telephone Line, Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed		
<b>Fax Features</b>			
<b>STORE SPECIFICATIONS</b>			
<b>Mail Box (Number supported)</b>	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes, 30,000 Maximum Pages Stored		
<b>Advanced Space</b>	Communication Protocol: SMB or WebDAV Supported Client PC: Windows (Windows 7/8.1/10) Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)		
<b>Advanced Space available disc space</b>	Approx. 16GB (Standard HDD) Approx. 480GB (with option 1TB HDD)		
<b>Advanced Space Features:</b>	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support Standard: USB Memory		
<b>Memory Media</b>			
<b>SECURITY SPECIFICATIONS</b>			
<b>Authentication</b>	Standard: Universal Login Manager (Device and Function Level Log-in), uniFLOW Online Express*, User Authentication, Department ID Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW) * No charge for this solution; however activation is required.	<b>Standards</b>	
<b>Data</b>	Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption (AES-256bit/CBC, FIPS140-2 Validated), Common Criteria Certification (DIN ISO 15408) Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal, Data Loss Prevention (Requires uniFLOW)	<b>CONSUMABLES</b>	
		<b>Toner Cartridges</b>	C-EXV 51 TONER BK/C/M/Y C-EXV 51L TONER C/M/Y
		<b>Toner Yield (Estimated @ 5% Coverage)</b>	C-EXV 51 TONER BK: 69,000 pages C-EXV 51 TONER C/M/Y: 60,000 pages C-EXV 51L TONER C/M/Y: 26,000 pages
		<b>SOFTWARE AND PRINTER MANAGEMENT</b>	
		<b>Tracking and reporting</b>	Universal Login Manager* (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device. uniFLOW Online Express: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location. *Installation, activation & registration required
		<b>Remote management tools</b>	iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management) eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) Content Delivery System: Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control
		<b>FIERY PRINT CONTROLLER SPECIFICATIONS (EMBEDDED)</b>	
		<b>Optional/Standard</b>	
		<b>Name</b>	Optional on all models imagePASS P2 (Embedded)
		<b>Print Resolution (dpi)</b>	1200 x 1200, 600 x 600
		<b>Page Description Language(s)</b>	Adobe PS3, PCL6
		<b>Memory</b>	4GB (1 x 4GB)
		<b>Hard Disk Drive</b>	500 GB SATA



# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE C5500 III series

<b>Processor Speed</b>	Intel Pentium G4400 (3.3 GHz)		
<b>System</b>	Fiery FS350		
<b>Fonts</b>	PS: 138 Fonts PCL: 113 Fonts		
<b>Supported Operating Systems</b>	Windows 7 32 and 64 bit / Windows 8.1 32 and 64 bit / Windows 10 32 and 64 bit / Windows Server 2012 64bit only / Windows Server 2012 R2 64bit only / Windows Server 2016 R2 64bit only / MAC OS (10.11, 10.12, 10.13, 10.14)		
<b>Interface</b>	2 x Ethernet (1000Base-T/100Base-TX/10Base-T), USB3.0 x 2 (Rear), USB2.0 x 4 (Rear)	<b>Staple Finisher-Y1 (External)</b>	Eco Staple: A3/A4/B4/B5: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 40 sheets (80 gsm) Dimensions (W x D x H): 466 x 525 x 225 mm Weight: Approx. 8.6 kg (Requires BUFFER PASS UNIT- L1) Number of Trays: 2 Upper Tray Capacity*: A4, A5, A5R, A6R, B5: 250 sheets, SRA3, A3, A4R, B4, B5R: 125 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 3,000 sheets (Thin: 1500 sheets), SRA3, A3, A4R, B4, B5R: 1,500 sheets, A6R: 250 sheets (52 to 105 gsm), 50 sheets (106 to 300 gsm) * with 81.4 gsm paper Paper Weight: Upper Tray 52 to 256 gsm, Lower Tray 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/B4/A4R: 30 sheets (52 to 90 gsm) Eco Staple: A3/A4: 5 sheets (52 to 64 gsm) 4 sheets (65 to 81.4 gsm) 3 sheets (81.5 to 105 gsm) Staple On Demand: 50 sheets (90 gsm) Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 31 kg (Requires BUFFER PASS UNIT- L1) (Includes the above STAPLE FINISHER-Y1 basic staple specifications.) Saddle Stitch paper size: A3, A4R, B4, Custom Size (195.0 x 270.0 mm to 304.8 x 457.2 mm) Saddle Sttch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm) (including 1 cover sheet up to 256 gsm) Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm) Dimensions (W x D x H): 637 x 623 x 1,142 mm (when the extension tray is extended) Weight: Approx. 57 kg (Requires the INNER FINISHER-H1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes A3, A4, A4R, A5, B4, B5, B5R Four holes A3, A4 Power Source: From the Main Unit (Requires the INNER FINISHER-H1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R Power Source: From the Main Unit (Requires either the STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1) Two or Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Two holes A3, A4, A4R, A5, B4, B5, B5R Four holes A3, A4 Power Source: From the Main Unit (Requires either the STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1) Four Holes Acceptable Punch Paper Weight: 52 to 300 gsm Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R Power Source: From the Main Unit
<b>Network protocols</b>	TCP/IP (FTP, SMTP, POP, HTTP, SNMP, LDAP, SLP, SMB, LPD, IPP, WS-Discovery, Bonjour, Direct Mobile Printing, Port9100, SNT, 802.1X, DHCP, DNS, NTP)		
<b>Direct Print</b>	PDF1.7, EPS, TIFF6, JDF1.4/JMF(OP)		
<b>VDP</b>	FreeForm v1, v2.1		
<b>Fiery Print Controller</b>	Fiery Command WorkStation 6 / Paper Catalog / Fiery Spot-On / Fiery Remote Scan		
<b>Standard Features</b>	Fiery Impose / Fiery Compose / Fiery Impose and Compose / Productivity Package Web Activate (include Fiery JDF) / Fiery Hot Folders & Virtual Printers		
<b>Fiery Print Controller Options</b>	E400 Debian of Linux AC100-240V, 50Hz/60Hz, 3.0A (100V) - 1.3A (240V) 47 W 285 x 93 x 295 mm Fiery unit only (with plate): 4.95 kg		
<b>HW Platform</b>			
<b>Base OS</b>			
<b>Power source</b>			
<b>Maximum Power consumption</b>			
<b>Dimensions (H x W x D)</b>			
<b>Weight</b>			
<b>PAPER SUPPLY OPTIONS</b>			
<b>Plain Pedestal Type - Q2</b>	Substituted for the cassette feeding unit, the pedestal raises the device, without adding further paper capacity.	<b>Booklet Fniisher-Y1 (External)</b>	
<b>Cassette Feeding Unit-AM1</b>	Paper Capacity: 2 x 550 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Transparency, Bond, Letterhead Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom size: 98.0 x 182.0 mm to 304.8 x 457.2mm Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 620 x 700 x 251 mm Weight: Approx. 22.5 kg		
<b>High Capacity Cassette Feeding Unit-A1</b>	Paper Capacity: 2,450 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Bond, Letterhead Paper Size: A4 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 620 x 700 x 251 mm Weight: Approx. 30.0 kg	<b>Inner 2/4 Hole Puncher-B1</b>	
<b>Paper Deck Unit - F1</b>	Paper Capacity: 2,700 sheets (80 gsm) Paper Type: Thin, Plain, Thick, Colour, Recycled, Pre-punched, Bond, Letterhead Paper Size: A4, B5 Paper Weight: 52 to 256 gsm Power Source: From the Main Unit Dimensions (W x D x H): 344 x 630 x 440 mm Weight: Approx. 31 kg	<b>Inner 4 Hole Puncher-B1</b>	
<b>OUTPUT OPTIONS</b>		<b>2/4 Hole Puncher Unit-A1</b>	
<b>Copy Tray-J2</b>	Provides a simple tray for basic output needs. Capacity: 100 sheets (A4, 80 gsm)		
<b>Inner 2-Way Tray-J1</b>	Allows the separation of copies, prints and faxes. Adds a second internal output tray to give a combined output capacity of 350 sheets (upper tray 100 sheets/lower tray 250 sheets). (A4, 80 gsm)	<b>4 Hole Puncher Unit-A1</b>	
<b>Inner Finisher-H1 (Internal)</b>	Number of Trays: 2 Upper Tray Capacity*: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R : 45 sheets Lower Tray Capacity*: A4, A5, A5R, B5: 500 sheets, SRA3, A3, A4R, B4, B5R, : 250 sheets, A6R: 30 sheets (64 to 300 gsm) * with 81.4 gsm paper Paper Weight: 52 to 300 gsm Staple Position: Corner, Double Staple Capacity: Corner and Double Stapling: A4/B5: 50 sheets (52 to 90 gsm) A3/B4/A4R: 30 sheets (52 to 90 gsm)	<b>OTHER OPTION Consumables</b>	STAPLE-P1 - For stapling (2 x 5,000 pcs) (for Staple Finisher-Y1/Booklet Finisher-Y1 or Inner Finisher-H1) STAPLE CARTRIDGE-Y1 - For saddle stitching (2 x 2,000 pcs) (for Booklet Finisher-Y1)

For a complete list of all Hardware accessories, please refer to our website specifications page or online product configurator.

## Software & Solutions



## Certifications and compatibility



**Canon Ireland**  
3006 Lake Drive  
Citywest, Saggart  
Co. Dublin, Ireland  
Telephone No: 01  
2052400  
Facsimile No: 01 2052525  
canon.ie

**Canon (UK) Ltd**  
Woodhatch  
Reigate  
Surrey RH2 8BF  
Telephone No: 01737  
220000  
Facsimile No: 01737 220022  
canon.co.uk

**Canon Inc.**  
canon.com  
**Canon Europe**  
canon-europe.com  
English edition  
© Canon Europa N.V., 2019