


# imageRUNNER C3326i

# RELIABILITY, SECURITY AND HIGH PRODUCTIVITY FROM A COLOR A3 MULTIFUNCTION PRINTER

## MAIN CONFIGURATION OPTIONS

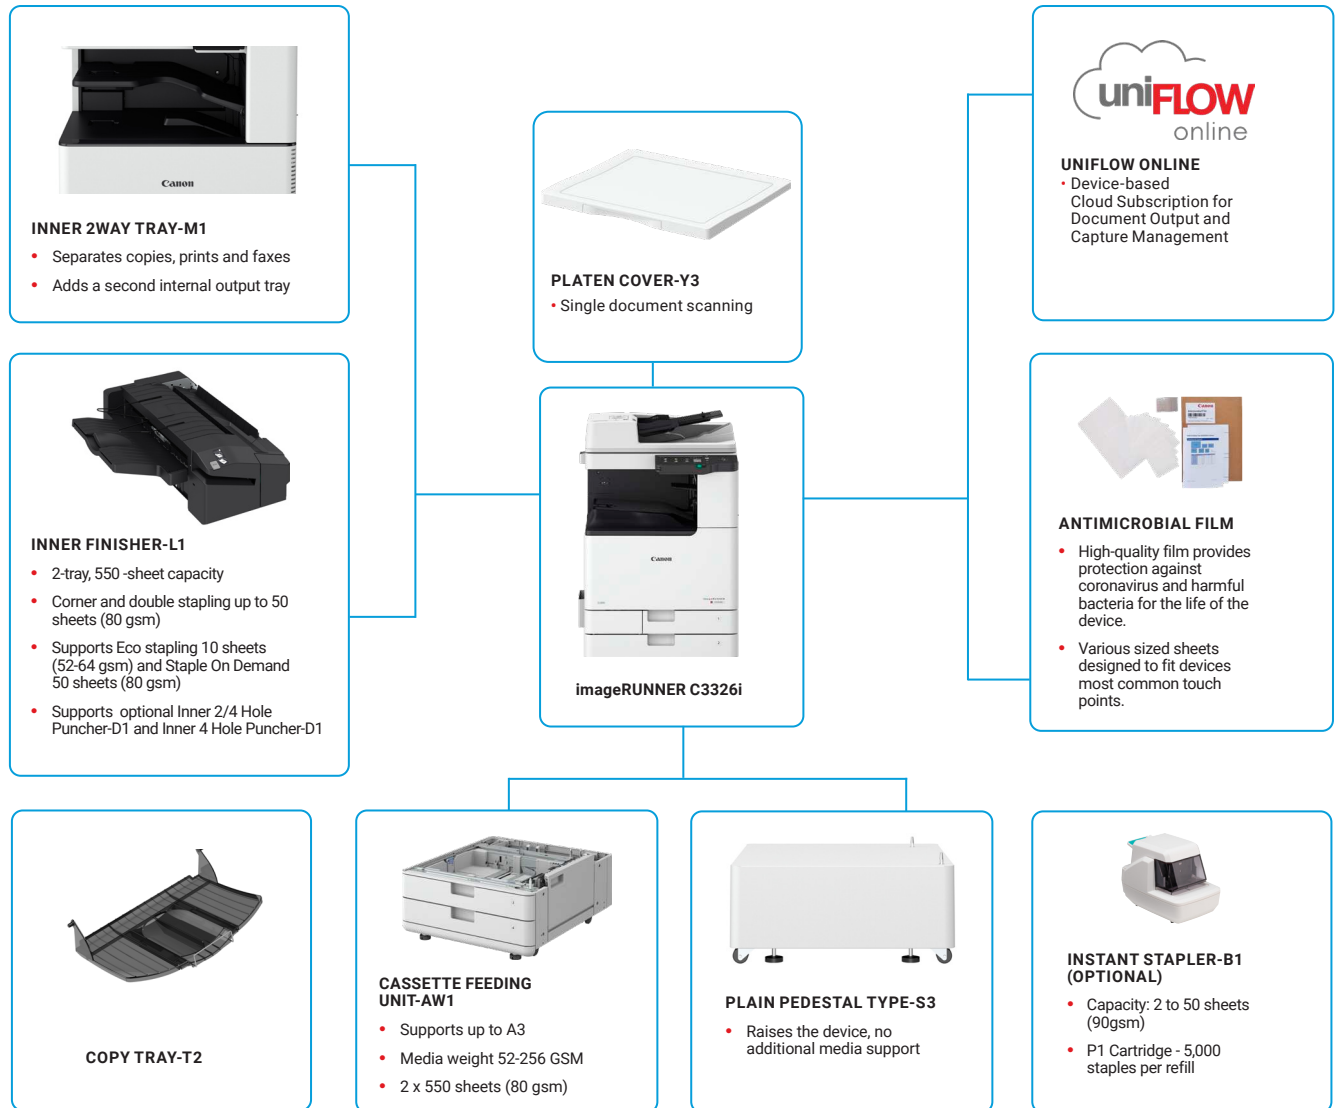

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the [online product configurator](#)

# TECHNICAL SPECIFICATIONS

# imageRUNNER C3326i

<b>MAIN UNIT</b>		<b>Printing from mobile and cloud</b>	AirPrint, Mopria, Canon PRINT Business, uniFLOW Online and Universal Print by Microsoft
<b>Machine type</b>	A3 Color Laser Multifunctional		Online and Universal Print by Microsoft
<b>Core functions</b>	Print, Copy, Scan, Send and Optional Fax		A range of software solutions is available to provide printing from mobile devices and cloud-based services depending on your requirements. Please contact your sales representative for further information
<b>Processor</b>	1.6 GHz Dual Core Processor	<b>OS Standard Printing</b>	Android/Windows® 10/Windows® 11/Chrome OS/macOS (11.2.2 or later), iOS (15.2 or later), iPadOS
<b>Control Panel</b>	17.8 cm/7 inch TFT LCD WVGA Color Touch panel	<b>Fonts</b>	PS fonts: 136 Roman PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andalé Mono WT J/K/S/T* <sup>1</sup> (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts* <sup>2</sup>
<b>Memory</b>	Standard: 2.0GB RAM		* <sup>1</sup> Requires optional PCL INTERNATIONAL FONT SET-A1 * <sup>2</sup> Requires optional BARCODE PRT KIT-D1
<b>Storage</b>	Standard: (eMMC) 64GB Optional: (SSD) 256GB	<b>Print Features</b>	Secure Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/Orientations, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer
<b>Interface Connection</b>	<b>NETWORK</b> Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE802.11b/g/n) <b>OTHERS</b> Standard: USB 2.0 (Host) x 2, USB 2.0 (Device) x 1	<b>Operating System</b>	UFR II: Windows®10/11/Server 2012/Server 2012 R2/Server 2016/Server 2019/Server 2022, MAC OS X (10.13 or later) PCL: Windows®10/11/Server 2012/Server 2012 R2/Server 2016/Server 2019/Server 2022, MAC OS X (10.13 or later) PS: Windows®10/11/Server 2012/Server 2012 R2/Server 2016/Server 2019/Server 2022, MAC OS X (10.13 or later) PPD: Windows®10/11, MAC OS X (10.13 or later)
<b>Paper Supply capacity (A4, 80gsm)</b>	Standard: 1,200 Sheets Maximum: 2,300 Sheets (with optional Cassette Feeding Unit-AW1)	<b>COPY SPECIFICATIONS</b>	
<b>Paper output capacity (A4, 80gsm)</b>	Standard: 250 Sheets Maximum: 650 Sheets (with optional Inner Finisher-L1 and Copy Tray-T2)	<b>Copy Speed</b>	1-sided (BW/CL): Up to 26/26 ppm (A4, A5, A5R, A6R), Up to 20/20 ppm (A4R), Up to 15/15 ppm (A3) 2-sided (BW/CL): Up to 13/13 ppm (A4, A5R), Up to 10/10 ppm (A4R), Up to 7/7 ppm (A3) (A4, BW/CL): Approx. 7.0 / 8.7 seconds or less
<b>Finishing capabilities</b>	Collate, Group, Offset, Staple, Hole Punch, Eco Staple, Staple On Demand * Finishing capabilities vary, depending on the options selected	<b>First-Copy-Out Time</b>	600 x 600
<b>Supported Media Types</b>	Multi-purpose Tray: Thin, Plain, Heavy*, Recycled, Coated, Color, Tracing, Bond, Transparency, Label, Pre-punched, Letterhead, Envelope * SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper Upper Cassette: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched, Letterhead, Envelope* * Envelope Feeder Attachment Kit B (standard) is required. Lower Cassette: Thin, Plain, Heavy, Recycled, Color, Bond, Transparency, Pre-punched, Letterhead, Envelope* * Envelope Attachment Kit A (standard) is required.	<b>Copy resolution (dpi)</b>	Up to 999 copies
<b>Supported media sizes</b>	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Envelopes: COM10 No.10, Monarch, ISO-C5, DL Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom size: 105.0 x 148.0 mm to 297.0 x 215.9 mm Envelope: ISO-C5 * Envelope Feeder Attachment Kit B (standard) is required. Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Envelope*: COM10 No.10, Monarch, DL * Envelope Attachment Kit A (standard) is required.	<b>Multiple Copies</b>	Automatic or Manual (9 Levels)
<b>Supported media weights</b>	Multi-purpose tray: 52 to 300 gsm Upper/Lower Cassette: 52 to 256 gsm Duplex: 52 to 220 gsm	<b>Copy Density</b>	25% - 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 70%, 100%, 141%, 200%, 400%
<b>Warm-Up Time (Quick start mode:ON)</b>	4 Seconds or Less* *Time from device power on to when copy icon appears and is enabled to operate on the touch panel display From Sleep Mode: 10 Seconds or Less	<b>Magnification</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Sort, Job Build, N on 1, Different Size Originals, Sharpness, Erase Frame, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
<b>Dimensions (W x D x H)</b>	10 Seconds or Less* *Time from device power on, until copy ready (not print reservation)	<b>Copy Features</b>	Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Sort, Job Build, N on 1, Different Size Originals, Sharpness, Erase Frame, Copy ID Card, Skip Blank Pages, Free Size Original, Color Mode, Reserved copy, Copy Sample
<b>Installation Space (W x D)</b>	565 x 687 x 891 mm	<b>SCAN SPECIFICATIONS</b>	
<b>Weight</b>	1168 x1116 mm Approx. 74.7 kg including toner	<b>Type</b>	Standard: Duplexing Automatic Document Feeder [2-sided to 2-sided] Optional: Platen Cover-Y3 Up to 100 sheets
<b>PRINT SPECIFICATIONS</b>		<b>Document Feeder Paper Capacity (80 gsm)</b>	Platen: Sheet, Book and 3-Dimensional objects Document Feeder media weight :
<b>Print Speed</b>	1-sided (BW/CL): Up to 26/26 ppm (A4, A5, A5R,A6R), Up to 20/20 ppm (A4R),Up to 15/15 ppm (A3) 2-sided (BW/CL): Up to 26/26 ipm (A4, A5R), Up to 20/20 ipm (A4R), Up to 15/15 ipm (A3) Up to 1200 x1200	<b>Acceptable Originals and weights</b>	1-sided scanning: 30 to 128 gsm (BW), 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)
<b>Print Resolution (dpi)</b>	Standard: UFR II, PCL6 Optional: Adobe® PostScript®3™ Supported file types: RUI: PDF, EPS, TIFF/JPEG, XPS USB Memory: PDF, TIFF/JPEG, XPS Network Place: PDF, TIFF/JPEG, XPS	<b>Supported media sizes</b>	Platen: max. scanning size: 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6 Custom size: 128.0 x 139.7 mm to 297.0 x 431.8 mm DADF (ipm: BW/CL, A4): 1-sided Scanning: 70/70 (300 dpi, send), 51/42 (600 dpi, copy) 2-sided Scanning: 35/35 (300 dpi, send), 25.5/25.5 (600 dpi, copy)
<b>Page description languages</b>		<b>Scan Speed</b>	
<b>Direct Print</b>			

# TECHNICAL SPECIFICATIONS

# imageRUNNER C3326i

Scan Resolution (dpi)	Scan for Copy: up to 600 x 600 Scan for Send: (Push,BW) up to 600 x 600, (Pull,BW) up to 600 x 600 (Push,CL) up to 300 x 300, (Pull,CL) up to 300 x 300	<b>SECURITY SPECIFICATIONS</b>	
Pull Scan Specifications	Scan for Fax: up to 600 x 600 Color Network ScanGear2. For both TWAIN and WIA Supported OS: Windows®10/11/Server 2012/Server 2012 R2/Server 2016/Server 2019/Server 2022	<b>Authentication and Access Control</b>	User Authentication (Picture Login, Picture and PIN Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
Scan Method	PushScan, PullScan, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud-based services (uniFLOW Online/Online Express)	<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print*), Recieve Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS*), Send Data Security (Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support) * Requires optional uniFLOW Online / uniFLOW ** Requires optional Universal Send Digital User Signature Kit-C1
<b>SEND SPECIFICATIONS</b>		<b>Network Security</b>	Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity, Checking MFD Software Integrity & Platform Firmware Resiliency (NIST SP800-193) with Automatic System Recovery (Verify System at Startup, Runtime Intrusion Detection enabled with McAfee Embedded Control), Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting, Remote Management Two-factor Authentication
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.1.1, FTP, WebDAV, Optional: Super G3 FAX	<b>Device Security</b>	Standard Storage Initialize, Job Log Conceal Function, Protecting MFP Software Integrity, Checking MFD Software Integrity & Platform Firmware Resiliency (NIST SP800-193) with Automatic System Recovery (Verify System at Startup, Runtime Intrusion Detection enabled with McAfee Embedded Control), Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting, Remote Management Two-factor Authentication
Address Book	LDAP (2,000)/ Local (1,600) /Speed dial (200)	<b>Device Management and Auditing</b>	Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Security Policy Setting, Remote Management Two-factor Authentication
Send resolution (dpi)	Push: 100 x 100, 150 x 150, 200 x 100 (Normal), 200 x 200 (Fine), 200 x 400*(SuperFine), 300 x 300, 400 x400*(UltraFine), 600 x 600* Pull: 75 x 75, 100 x 100, 150 x 150, 200 x 200, 300 x 300, 400 x 400*, 600 x 600* *Color mode is black and white only	<b>ENVIRONMENTAL SPECIFICATIONS</b>	
Communication protocol	File: FTP (TCP/IP), SMB3.1.1 (TCP/IP), WebDAV Email/iFax: SMTP (send), POP3 (receive)	<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity)
File Format	Standard: TIFF (MMR), JPEG *, PDF (Compact, Searchable, PDF/A-1b, Encrypted), XPS (Compact, Searchable), PDF/XPS (Device Signature, Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth), PDF/XPS (User Signature) *Single page only	<b>Power source</b>	110-127V 60Hz 8.5A 220-240V 50/60Hz 5A
Universal Send Features	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Erase Frame, Job Build, Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation	<b>Power consumption</b>	Maximum: Approx. 1,500 W Standby: Approx. 44 W* Sleep mode: Approx. 2.0W* <sup>2</sup> , Approx. 1.0W* <sup>3</sup> * <sup>1</sup> Reference value: measured one unit * <sup>2</sup> Wireless LAN power serve mode OFF * <sup>3</sup> Wireless LAN power serve mode ON * <sup>2&amp;3</sup> Sleep mode is not available in all circumstances due to certain settings.
<b>FAX SPECIFICATIONS</b>		<b>Noise levels (BW/CL)</b>	Typical Electricity Consumption (TEC)*: 0.32 kWh  <b>Sound Power Level (LWA,m)</b> Active (1-sided) : 6.0B* <sup>1</sup> , 0.3B* <sup>1</sup>  <b>Sound Pressure Level (LpAm)</b> Bystander's position: Active (1-sided) : 46 dB* <sup>1</sup>  * <sup>1</sup> Reference value: measured only one unit with ISO7779, described with ISO9296:2017
Maximum Number of Connection Lines	1	<b>Standards</b>	Blue Angel (Applied for)
Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps	<b>CONSUMABLES</b>	
Compression Method	MH, MR, MMR, JBIG	<b>Toner Cartridge</b>	C-EXV 65 Toner BK/C/M/Y
Resolution (dpi)	400 x 400 (Ultrafine), 200 x 400 (Superfine), 200 x 200 (Fine), 200 x 100 (Normal)	<b>Toner Yield</b>	(Estimated Yield @ 5% Coverage) C-EXV 65 Toner BK: 17,500 pages C-EXV 65 Toner C/M/Y: 11,000 pages
Sending/Receiving Size	Sending: A3, A4, A4R, A5* <sup>1</sup> , A5R* <sup>1</sup> , B4, B5* <sup>2</sup> , B5R* <sup>1</sup> Receiving: A3, A4, A4R, A5R, B4, B5, B5R * <sup>1</sup> Sent as A4 * <sup>2</sup> Sent as B4 short		
FAX memory	Up to 30,000 pages		
Speed dials	Max. 200		
Group dials/destinations	Max. 199 dials		
Sequential broadcast	Max. 256 addresses		
Memory backup	Yes		
Fax Features	Sender's Name (TTI), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox		
<b>STORE SPECIFICATIONS</b>			
Memory Media	Standard: USB Memory		

## SOFTWARE AND PRINTER MANAGEMENT

Tracking and reporting  
Remote management tools

uniFLOW Online Express  
iW Management Console  
eMaintenance  
Content Delivery System  
ScanGear

Scanning software

## PAPER SUPPLY OPTIONS

Cassette Feeding

Cassette Feeding Unit-AW1:

Paper Capacity: 550 sheets x  
2 (1,100 sheets) (80 gsm)  
Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond,  
Transparency, Pre-punched, Letterhead  
Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R,  
Custom Size: 105.0 x 148.0 mm to  
304.8 x 457.2 mm  
Paper Weight: 52 to 256 gsm  
Power Source: From the Main Unit  
Dimensions (W x D x H): 565 x 635 x 248 mm  
Weight: Approx. 16.0 kg

## OUTPUT OPTIONS

Inner Tray

Inner 2way Tray-M1:

Tray Capacity (80 gsm paper)  
Upper tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5,  
B5R: 100 sheets  
Lower tray (standard tray): A4, A5, A5R, A6R, B5,  
B5R: up to 250 sheets  
SRA3, A3, A4R, B4: up to 100 sheets  
Paper Weight: 52 to 300 gsm  
Dimensions (W x D x H): 428 x 405 x 88 mm  
Weight: Approx. 0.7 kg

Copy Tray

Copy Tray-T2:  
Capacity (with 80gsm paper):  
A4, A5R, B5, B5R: 100 sheets  
A3, A4R, B4: 75 sheets  
Dimensions (W x D x H): 442 x 373 x 176 mm (attached  
to the main unit, when the extension tray is extended)  
Weight: Approx. 0.5kg

## Inner Finisher

Inner Finisher-L1:

Tray Capacity (with 80gsm paper):  
Upper Tray: A4, A5, A5R, B5: approx. 50 sheets  
SRA3, A3, A4R, A6R, B4, B5R: approx. 50  
sheets  
Lower Tray: A4, A5, A5R, B5: approx. 500 sheets  
SRA3, A3, A4R, B4, B5R: 250 sheets  
A6R: 30 sheets  
Envelope: 10 sheets  
Paper Weight: 52 to 300 gsm  
Staple Position: Corner, Double  
Staple Capacity:  
A4, B5: 50 sheets (52 to 90 gsm)  
A4R : 40 sheets (52 to 90 gsm)  
A3, B4: 30 sheets (52 to 90 gsm)  
Staple Free:  
A3, A4, B4, B5: 10 sheets (52 to 64 gsm)  
8 sheets (65 to 81.4 gsm)  
6 sheets (82 to 105 gsm)  
Staple On Demand: approx. 40 sheets (80 gsm)  
Dimensions (W x D x H): 575 x 525 x 225 mm (when  
the extension tray is extended)  
Weight: Approx. 9.1 kg

## Inner 2/4 Hole Puncher

Inner 2/4 Hole Puncher-D1 (Requires Inner Finisher-L1):  
Two or Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size:  
Two holes: A3, A4, A4R, A5, B4, B5, B5R,  
Four holes: A3, A4

## Inner 4 Hole Puncher

Inner 4 Hole Puncher-D1 (Requires Inner Finisher-L1):  
Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size: A3, A4, A4R, A5, B4, B5,  
B5R

## HARDWARE ACCESSORIES

Card Readers

IC Card Reader Attachment-B4

Others

Platen Cover-Y3

## SYSTEM AND CONTROLLER OPTIONS

Print Accessories

PCL International Font Set-A1  
PS Printer Kit-CS1

Data Storage

Optional Data Storage Kit-A1

Send Options

Universal Send Trace & Smooth PDF Kit-A1  
Universal Send Digital User Signature Kit-C1

Barcode Printing

Barcode Printing Kit-D1

System Accessories

Copy Control Interface Kit-D1

Fax Accessories

Super G3 FAX Board-BN1  
Remote Fax Kit-A1

## OTHER OPTIONS

Accessibility Accessories

ADF Access Handle-A1  
Media Adjustment kit-A1

Staple Cartridges

Staple-P1