


# For that moving target called business growth.

Keep building your business with the compact and versatile TASKalfa 508ci Series. Ideal for small to mid-size businesses, these dynamic multifunction printers grow with you as your needs evolve. You'll appreciate the intuitive 7" Color Touch Screen with tablet-like functionality that makes it easy to find features and interact with business apps. No matter what your needs are and how they change, these intelligent systems have the power to pivot as quickly as you do.



<b>TASKalfa 508ci Series</b> 
<b>Up to 52 Pages per Minute</b>
<b>Professional Finishing Options</b>
<b>HyPAS-enabled for Solutions &amp; Apps</b>
<b>KYOCERA Net Manager</b>

**TASKalfa 508ci / 408ci**  
**TASKalfa 358ci / 308ci**

# The TASKalfa 508ci / 408ci / 358ci / 308ci Options



Only available for the TASKalfa 508ci / 408ci / 358ci models  
Available on all TASKalfa 508ci / 408ci / 358ci / 308ci models

<sup>1</sup> Requires AK-5100

<sup>2</sup> Requires PF-5120

# General Specifications



## TASKalfa 508ci

**Pages Per Minute:** Color and Black – Letter: 52 ppm, Legal: 42 ppm,

**Warm Up Time:** 24 Seconds or Less (Power On)

**First Page Out:**

Copy: 5.3 Seconds or Less Black, 6.2 Seconds or Less Color

Print: 5.4 Seconds or Less Black, 6.4 Seconds or Less Color

**Typical Electricity Consumption (TEC):** 120V: 0.71 kWh/week; 220V: 0.67 kWh/week

**Weight:** 109 lbs (excludes Optional Document Processor)

**Maximum Monthly Duty Cycle:** 150,000 Pages per Month

**Dimensions:** 21.65" W x 21.65" D x 24.13" H

## TASKalfa 358ci

**Pages Per Minute:** Color and Black – Letter: 37 ppm, Legal: 30 ppm,

**Warm Up Time:** 24 Seconds or Less (Power On)

**First Page Out:**

Copy: 5.9 Seconds or Less Black, 7.3 Seconds or Less Color

Print: 5.5 Seconds or Less Black, 6.5 Seconds or Less Color

**Typical Electricity Consumption (TEC):** 120V: 1.86 kWh/week; 220V: 1.66 kWh/week

**Weight:** 104.5 lbs (excludes Optional Document Processor)

**Maximum Monthly Duty Cycle:** 100,000 Pages per Month

**Dimensions:** 21.65" W x 19.96" D x 29.13" H

## TASKalfa 408ci

**Pages Per Minute:** Color and Black – Letter: 42 ppm, Legal: 34 ppm,

**Warm Up Time:** 24 Seconds or Less (Power On)

**First Page Out:**

Copy: 5.8 Seconds or Less Black, 6.9 Seconds or Less Color

Print: 5.4 Seconds or Less Black, 6.4 Seconds or Less Color

**Typical Electricity Consumption (TEC):** 120V: 0.59 kWh/week; 220V: 0.55 kWh/week

**Weight:** 109 lbs (excludes Optional Document Processor)

**Maximum Monthly Duty Cycle:** 150,000 Pages per Month

**Dimensions:** 21.65" W x 21.65" D x 24.13" H

## TASKalfa 308ci

**Pages Per Minute:** Color and Black – Letter: 32 ppm, Legal: 26 ppm,

**Warm Up Time:** 20 Seconds or Less (Power On)

**First Page Out:**

Copy: 6.4 Seconds or Less Black, 7.8 Seconds or Less Color

Print: 7.0 Seconds or Less Black, 8.0 Seconds or Less Color

**Typical Electricity Consumption (TEC):** 120V: 1.55 kWh/week; 220V: 1.43 kWh/week

**Weight:** 109.3 lbs (includes Standard RADF)

**Maximum Monthly Duty Cycle:** 100,000 Pages per Month

**Dimensions:** 21.65" W x 19.96" D x 29" H (includes RADF)

## Specifications

### Basic Specifications

**Configuration:** Color Multifunctional System – Print/Scan/Copy/Optional Fax

**Duplex:** Standard Stackless Duplex Supports Statement to Legal (5.5" x 8.5" – 8.5" x 14"), 16 lb Bond – 120 lb Index (60 – 220gsm)

**Display:**

New 7" 800 x 480 dot Color Touch Screen Control Panel<sup>1</sup>  
7" Color Touch Screen Control Panel<sup>2</sup>

**Resolution:** 600 x 600 dpi; 1200 x 1200 dpi  
(At reduced speed)

**Memory:** 4GB Standard<sup>1</sup> / 1.5GB Standard  
(3GB Maximum)<sup>2</sup>

**Hard Disk Drive:** 320GB HDD Standard<sup>1</sup>  
Optional 32GB (HD-6) or 128GB (HD-7) SSD<sup>2</sup>

**Standard Output Tray:**

Statement – Legal: 500 sheets; up to 8.5" x 48" Banner  
Single Sheet<sup>1</sup> / Statement – Legal 500 Sheets<sup>2</sup>

**Electrical Requirements:** 120V, 60Hz, 8.5A, 8.9A, 10.2A,  
10.5A; 220-240V, 50Hz, 5.4A

**Dimensions:** 21.65" W x 19.96" D x 29.13" H (includes RADF)

### Print Specifications

**Standard Controller:** Freescale QorIQ T1024 / 1.0GHz<sup>1</sup>  
Main: SoC (PPC465S) 1GHz<sup>2</sup>

**PDLs / Emulations:** PRESCRIBE, PCL6 (PCL-XL / PCL5c),  
KPDLL3 (PS3), XPS, OPEN XPS

**Optional (UG-34):** IBM ProPrinter, Line Printer, LQ-850

**Print Resolution:** Up to 1200 x 1200 dpi (At reduced speed)

**Interfaces:** Standard: 10/100/1000BaseTX, Hi-Speed USB  
2.0, 3 USB Host Interfaces (2 USB Host Interfaces for the  
308ci), 2 Expansion Slots

### Scan Specifications

**Scan Speeds (mono/color) A4,LTR @ 300 dpi:**

**DP-5100<sup>3</sup>:** Simplex: 60, 62 ipm BW / 60, 62 ipm Color;

Duplex: 26, 27 ipm BW / 26, 27 ipm Color

**DP-5120<sup>3</sup>:** Simplex: 60, 62 ipm BW / 60, 62 ipm Color;

Duplex: 120, 124 ipm BW / 120, 124 ipm Color

**DP-5130<sup>3</sup>:** Simplex: 85, 87 ipm BW / 65, 67 ipm Color;

Duplex: 170, 174 ipm BW / 130, 134 ipm Color

### Copy Specifications

**Job Management:** 1,000 Department Codes<sup>1</sup> /  
100 Department Codes<sup>2</sup>

### Optional Document Processors<sup>3</sup>

**Type / Capacity:**

**DP-5100<sup>3</sup>:** Reversing Automatic Document Processor / 75  
Sheets

**DP-5120<sup>3</sup>:** Dual Scan Document Processor / 100 Sheets

**DP-5130<sup>3</sup>:** Dual Scan Document Processor / 270 Sheets

**Acceptable Originals:**

5.5" x 8.5" – 8.5" x 74.8" (1900mm)<sup>1</sup>

5.5" x 8.5" – 8.5" x 36" (915mm)<sup>2</sup>

**Acceptable Weights:**

**DP-5100<sup>3</sup>:**

Simplex: 13 – 32 lb Bond (50 – 120gsm);

Duplex: 13 – 32 lb Bond (50 – 120gsm)

**DP-5120<sup>3</sup>:**

Simplex: 13 – 32 lb Bond (50 – 120gsm);

Duplex: 13 – 32 lb Bond (50 – 120gsm)

**DP-5130<sup>3</sup>:**

Simplex: 13 – 32 lb Bond (50 – 120gsm);

Duplex: 13 – 32 lb Bond (50 – 120gsm)

### Optional Fax Processors

**Fax Type:** Fax System 10(X)<sup>1</sup> / Fax System 11<sup>2</sup>

**Fax Memory:** Standard 170 MB (No scalability: Maximum  
170 MB)<sup>1</sup> / 3.5 MB<sup>2</sup>

### Optional 1,000 Sheet Finisher DF-5110<sup>1,5,6</sup>

**Stack / Staple Capacity:**

**Main Tray:** 1,000 Sheets (up to 80gsm) / 50 Sheets  
(up to 24 lb Bond [90gsm])

**Paper Size:** 5.5" x 8.5" – 8.5" x 14"

**Paper Weight:** 16 lb Bond – 120 lb Index (60 – 220gsm)

**Edge Staple Position:** 3 Positions: Top Left, Bottom Left,  
Center Bind

**Optional Punch:** PH-5100 2 and 3 Hole Punch Unit,  
Supports 5.5" x 8.5" – 8.5" x 14"; 16 lb Bond – 120 lb Index  
(60 – 220gsm)

**Dimensions:** 23.27" W x 20.35" D x 39.58" H

### Optional 3,200 Sheet Finisher DF-5120<sup>1,5,6</sup>

**Stack / Staple Capacity:** Main Tray (A): 3,000 Sheets; Sub  
Tray (B): 200 Sheets / 50 Sheets

**Paper Size:** 5.5" x 8.5" – 8.5" x 14"

**Paper Weight:** 16 lb Bond – 120 lb Index (60 – 220gsm)

**Edge Staple Position:** 3 Positions: Top Left, Bottom Left,  
Center Bind

**Standard Punch:** PH-5100 2 and 3 Hole Punch Unit,  
Supports 5.5" x 8.5" – 8.5" x 14"; 16 lb Bond – 120 lb Index  
(60 – 220gsm)

**Dimensions:** 25.59" W x 20.94" D x 42.35" H

### Additional Options

**Common for 508ci / 408ci / 358ci / 308ci:**


Job Separator3 (JS-5100), Job Separator2 (JS-5100),  
Scan Extension Kit (A) for Searchable PDF/OCR,  
Bridge Unit Attachment Kit (AK-5100), ThinPrint (UG-33),  
Document Tray (DT-5100), Card Authentication Kit (B),  
5 Bin Mailbox (MT-5100), Card Reader Holder (11),  
Wireless Card IB-50, Wireless Card IB-51

**Only available for 508ci/408ci/358ci**

Internet Fax Kit (A), Emulation (UG-34), Key Counter,  
Key Counter Attachment Kit

**Only available for 308ci:**

SD Card4 (16 or 32GB), Scan Extension Kit,  
Wireless Card IB-35, Standard Data Security Kit - (HD-6  
or HD-7 is required)

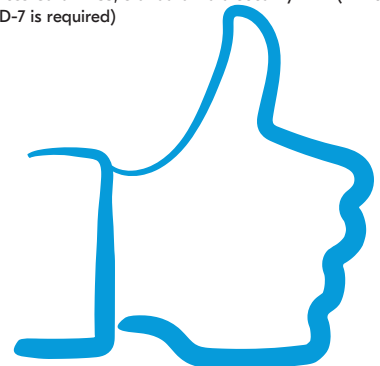



The TASKalfa 508ci Series are compact, highly scalable, multifunction systems that streamline your document processing. A host of intelligent features boost productivity, from robust paper handling and advanced finishing to a standard security kit.

## Additional Specifications

### Security Specifications

**Standard:** Local Authentication, Network Authentication, IPsec, SNMPv3, IEEE802.1x, IPP over SSL/TLS, HTTPS, FTP over SSL/TLS, SMTP over SSL/TLS, POP3 over SSL/TLS, Enhanced WSD over SSL/TLS, LDAP over SSL/TLS

**Data Security Function:** HDD Overwrite Mode, HDD Data Encryption

### Print Specifications

**Fonts:** 136 KPDLL3, 93 PCL6, 8 Windows Vista, 1 Bitmap

**OS Compatibility:** Windows: 7/8/8.1/10/Server 2008/Server 2008 R2/Server 2012/Server 2012 R2/Server 2016/Server 2019

**Mac:** OS Compatibility: Mac OS 10.9 and later, AirPrint Enabled

**Mobile Printing:** Apple AirPrint®, Google Cloud Print™, Mopria®, KYOCERA Mobile Print

**Optional:** 10/100/1000BaseTX (IB-50 for Dual NIC);  
Optional: IEEE 802.11 b/g/n (IB-51 for Wireless LAN Interface)

IEEE 802.11 b/g/n (IB-35 for Wireless LAN Interface)<sup>2</sup> Comes standard with IB-35<sup>1</sup>

**Network Print and Supported Protocols:** TCP/IP, IPv4, IPv6; HTTP, LPD, FTP, IPP, RawPort, LLTD, SNMP, DHCP, SMTP, POP3, DNS, SNMPv1/v2, WSD Scan/Print

**Drivers:** KX Driver, PCL Mini Driver, KPDLL Mini Driver, KX Driver for XPS, Network Fax Driver, TWAIN Driver, WIA Driver, PPD for MAC, PPD for Linux

**Utilities:** KYOCERA Net Manager, KYOCERA Net Viewer, KYOCERA Capture Manager, Command Center RX

### Paper Supply

**Standard Paper Sources:** Single 500 Sheet Tray, 100 Sheet MPT

**Optional Paper Sources:** 500 Sheet Tray (PF-5120), Dual 500 Sheet Trays (PF-5130)<sup>4</sup>; 2,000 Sheet Large Capacity Tray (PF-5140)<sup>4</sup>

**Paper Capacity:** Standard: 600 Sheets;  
Maximum: 3,100 Sheets

### Paper Size:

Tray 1 – PF-5120 and PF-5130: 5.5" x 8.5" – 8.5" x 14"  
(Statement to Legal); PF-5140: 8.5" x 11" (Multiple Sheets)  
MPT: 5.5" x 8.5" – 8.5" x 14" (up to 1220mm/ up to 48inch Single Sheet<sup>1</sup> / up to 356mm Multiple Sheets<sup>2</sup>)

**Paper Weight:** Trays/MPT: 16 lb Bond – 120 lb index (60 – 220gsm)

**Input Materials:** Standard/Optional Drawer: Plain Paper, Bond Paper, Recycled Paper, Envelopes; MPT: Plain Paper, Bond Paper, Recycled Paper, Cardstock, Transparencies, Labels, Envelopes

### Scan Specifications

**File Formats:** TIFF (MMR compression), PDF (MMR compression), PDF (high compression), OpenXPS, XPS, JPEG

**PDF Extension:** Searchable PDF (OCR) Option

**Connectivity / Supported Protocols:** 10/100/1000BaseTX, TCP/IP, Hi-Speed USB 2.0

**Scanning Functions:** Scan to Folder (SMB), Scan to e-Mail, Scan to FTP, Scan to FTP over SSL, Scan to USB, WSD Scan, TWAIN Scan

**Original Size:** Through DP: Statement to Banner (5.5" x 8.5" – 8.5" x 72 inch)

Glass: Statement to Legal (5.5" x 8.5" – 8.5" x 14 inch)

### Copy Specifications

**Copy Resolution:** 600 x 600 dpi

**Image Mode:** Text, Photo, Text/Photo, Graphic/Map

**Continuous Copy:** 1 – 9999<sup>1</sup>, 1 – 999<sup>2</sup> / Auto Reset to 1

**Additional Features:** Auto Magnification, Auto Paper Select, Auto Start, Auto Drawer Change, Interrupt Copy

**Magnification / Zoom:** Full Size, 5 Reduction<sup>1</sup>, 7 Reduction<sup>2</sup>, 5 Enlargement Preset Ratios, 25-400% in 1% step increments

**Document Box:** Custom Box, Job Box, Removable Memory Box, Fax Box (with optional Fax System)

### Optional Fax Specifications

**Compatibility / Data Compression:** Super G3 Fax / MMR, MR, MH, JBIG

**Transmission Speed / Modem Speed:** Less than 3 seconds / 33.6 Kbps

**Driver:** Network Fax Driver

**Fax Functions:** Network fax, duplex transmission and reception, encrypted transmission and reception, polling transmission and reception, broadcast

## Output & Finishing Options

### Optional 300 Sheet Internal Finisher DF-5100<sup>5</sup>

**Stack / Staple Capacity:**

300 Sheets / 50 Sheets (up to 21 lb Bond [80gsm])

**Paper Size:** 5.5" x 8.5" – 8.5" x 14"

**Paper Weight:** 16 lb Bond – 120 lb Index (60 – 220gsm)

**Edge Staple Position:** 3 Positions: Front 1 staple, Edge 1 staple, Face 2 staple

**Dimensions:** 19.13" W x 15.55" D x 6.22" H

<sup>1</sup> Only available for the TASKalfa 508ci / 408ci / 358ci model

<sup>2</sup> Only available for the TASKalfa 308ci model

<sup>3</sup> Comes standard on the TASKalfa 308ci model

<sup>4</sup> Requires PF-5120

<sup>5</sup> Only 1 output option can be installed

<sup>6</sup> Requires Bridge Unit Attachment Kit (AK-5100)

<sup>7</sup> Only 1 Document Processor can be installed



Specifications and design are subject to change without notice. For the latest on connectivity visit [usa.kyoceradocumentsolutions.com](http://usa.kyoceradocumentsolutions.com). TASKalfa, KYOCERA Net Manager, and Command Center RX are trademarks of the Kyocera Companies. AirPrint is a trademark of Apple, Inc. Google Cloud Print is a trademark of Google, Inc. Mopria is a trademark of Mopria Alliance, Inc. All other trademarks are the property of their respective owners.